

## IUU180 series

V1.2

## 180W U Bracket Power Supply for Industrial Purpose

The IUU180 series of AC/DC switching mode power supplies provide 180 Watts of continuous output power. All supplies are UL94V-1 min compliant. All models meet FCC Part-15 class B and CISPR-22 class B emission Limits and are designed to comply with UL/c-UL, TUV/Bauart and CE marking conformity assessment. All units are 100% burned in and tested.

**RoHS2**  
2011/65/EU



### FEATURES:

- \* Wide Operating Voltage, 90 to 260 VAC, 47 to 63 Hz
- \* Internal EMI filter
- \* Active Power Factor Correction
- \* Crowbar Mode Over Voltage Protection
- \* Input Surge Current and Over Load protection
- \* Single Output
- \* Operating temperature -20~70°C
- \* 5 year warranty

### APPLICATIONS:

- \* Industrial PC
- \* Electrical Test & Measurement Instruments
- \* Communication equipment
- \* AV equipment

### GENERAL SPECIFICATION:

- \* **Short Circuit Protection:** Auto Recovery
- \* **Cooling:** Free Air Convection
- \* **Flammability Rating:** UL94V-1
- \* **Protection Classes:** Class I
- \* **Safety:** UL 60950-1:2nd Edition, CSA C22.2 No.60950-1-07  
IEC 60950-1:2005/A2:2013, EN 60950-1:2006/A2:2013

### APPROVALS:



### Electrical Characteristics:

Symbol	Characteristic	Condition	Min.	Typ.	Max.	Unit
Vins	Safety Approval Input Voltage Range	Safety Approval & Specification in Label	100		240	VAC
Vin	Input Operate Voltage Range	Detail to see Fig.1	90		260	VAC
Fi	Input Frequency	Sine wave	47		63	Hz
PF	Power Factor Correction	Io=Full load, Vin=240VAC	0.95		1	
Po	Output Power Range	See Rating Chart			180	W
Iil	Low Line Input Current	Full Load, Vin=100VAC		2.3		A
Iih	High Line Input Current	Full Load, Vin=240VAC		0.95		A
Irl	Low Line Input Inrush Current	Full Load, 25°C, Cool start, Vin=100VAC			60	A
Irh	High Line Input Inrush Current	Full Load, 25°C, Cool start, Vin=240VAC			144	A
Ik	Safety Ground Leakage Current	Vin=240VAC, Fi=60Hz			0.75	mA
η	Efficiency	Full Load, Vin=230VAC, Detail to see Rating Chart	See Rating Chart			
ΔVoi	Line Regulation	Full Load, Vin=100~120VAC	0.5		1	%
ΔVoL	Load Regulation	Vin=230VAC, 10~90% Load Change at Condition	2		5	%
OVP	Over Voltage Protection	Over Voltage Protection	112		132	%
OLP	Over Load Protection	Recovers automatically after fault condition is removed	110		150	%
ttr	Time of Transient Response	Io=Full Load to Half Load, Vin=110VAC			4	ms
thu	Hold-Up Time	Full Load, Vin=100VAC	See Rating Chart			
ts	Start-up time	Full Load, Vin=100~240VAC			2	s
Tc	Temperature Coefficient	Full load, Vin=100~240VAC			±0.04	%/°C
HV	Dielectric Withstanding Voltage (P-S)	Primary to Secondary			4242	VDC
Vpg	Dielectric Withstanding Voltage (P-G)	Primary to PE			2121	VDC
EMI	EMC Emission	Compliance to EN55022 (CISPR22)			B	Class

### Environmental:

Symbol	Characteristic	Condition	Min.	Typ.	Max.	Unit
To	Operating Temperature	Detail to see Fig.2 (Derate linearly from 100% load at 50°C to 50% load at 70°C)	-20		70	°C
Ts	Storage Temperature	10 ~ 95% RH	-40		85	°C
Ho	Operating Humidity	non-condensing	0		95%	RH
Hs	Storage Humidity		0		95%	RH
ESDa	Electro Static Discharge	Air Discharge, IEC61000-4-2			8	kV
ESDc	Electro Static Discharge	Contact Discharge, IEC61000-4-2			4	kV
MTBF	Mean Time Between Failure	Operating Temperature at 25°C, Calculated per MIL-HDBK-217F	100k			h
ELEV	Operating Altitude (Elevation)	All condition			2000	m
VBR	Vibration	10 ~ 500Hz, 10min./1cycle, 60min. each along X, Y, Z axes			5	G
Vsl	Surge Voltage	Line-Neutral			1	kV
Vsg	Surge Voltage	Line-PE & Neutral-PE			2	kV


## IUU180 series

V1.2


## 180W U Bracket Power Supply for Industrial Purpose

### SPECIFICATION NOTE :


- Output can provide up to peak load when the power supply starts up. Continuous staying in more than rated load is not allowed.
- At factory, in 60% rated load condition, each output is checked to be within voltage accuracy.
- Line regulation is defined by changing  $\pm 10\%$  of input voltage from nominal line at rated load.
- Load regulation is defined by changing  $\pm 40\%$  of measured output load from 60% rated load.
- The ripple is measured from peak to peak with a bandwidth-limit of 20MHz (Measured at the output connector with a 0.1uF ceramic capacitor and a 47uF electrolytic capacitor).
- Hold up time is measured from the end of the last charging pulse to the time which the main output drops down to low limit of main output at rated load and nominal line.
- Efficiency is measured at rated load, and nominal line.

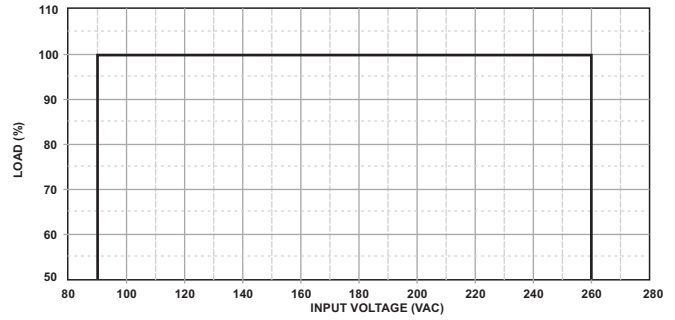


(FIG.1) INPUT VOLTAGE DERATING CURVE

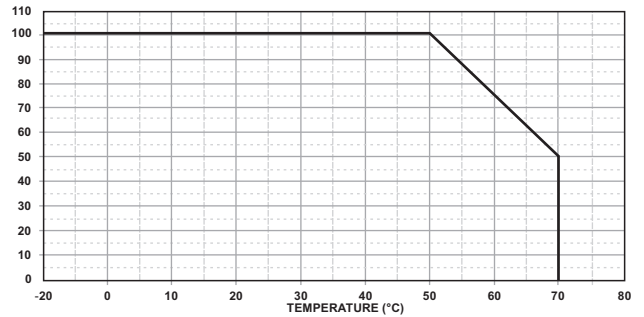

(FIG.2) TEMPERATURE DERATING CURVE

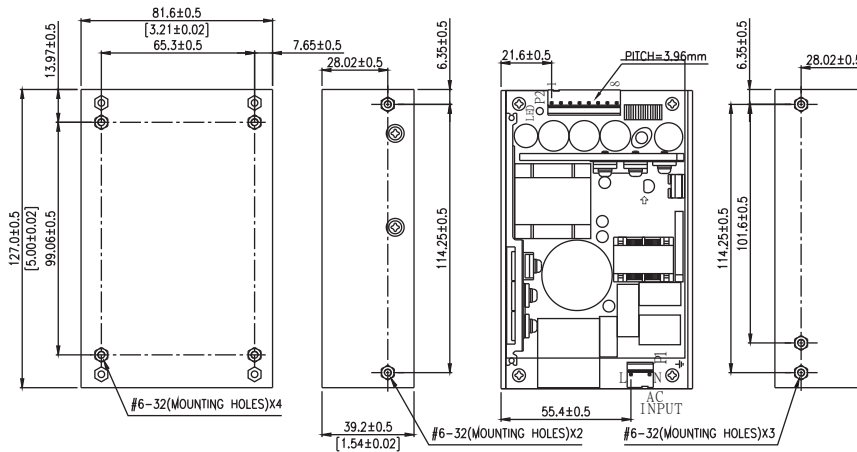

**(IUU180-105 ONLY)**  
IUU180-105 is required to use screw terminal



### PACKING :

- Dimensions are shown in mm.
- Weight: 521gs approx.
- IUU180-105 is required to use DINKLE#DT-2N-B01W-04.
- Input connector mates with Molex housing 09-52-4034 and Molex 2478 series crimp terminal.
- Output connector mates with Molex housing 09-52-4084 and Molex 2478 series crimp terminal.

### PIN CHART

MODEL	PIN	1	2	3	4	5	6	7	8
IUU180-105		RTN	RTN	OUT	OUT	screw terminal			
IUU180-1XX		RTN	RTN	RTN	RTN	OUT	OUT	OUT	OUT

### Rating Chart:

MODEL NO.	Setting Voltage Range (Factory setting, can't be adjusted)	Output Current (Based on the output volt.)	Maximum Output Power (W)	Ripple & Noise (mVp-p)	Total Regulation (%)	Typ. Efficiency (%)	Typ. No Load Consumption (W)	Hold-Up Time (ms)	Protection Mode
	(VDC)	(A)							
*IUU180-105	12.0	14.58	175	120	$\pm 5$	87	2	20	Hiccup
IUU180-108	24.0	7.50	180	100	$\pm 3$	87	2	20	Hiccup
*IUU180-110	36.0	5.00	180	360	$\pm 2$	87	2	20	Hiccup
IUU180-111	48.0	3.75	180	480	$\pm 2$	87	2	20	Hiccup

[\*] =MOQ is required. Please contact sales.